

Complexity and challenges in agricultural water reuse monitoring from a German perspective

Pascal Hasselder ^{a,*}, Manuela Helmecke^b, Andreas Tiehm^c, Benedikt M. Aumeier^d, Christina Förster^e, Daniel Zahn ^f, Johannes Ho^c, Michael Stapf^g, Nicole Zacharias^h, Thomas Dockhornⁱ, Ulf Miehe^g and Aki S. Ruhl^{a,j}

^a Section of Water Treatment (II 3.3), German Environment Agency, Schichauweg 58, 12307 Berlin, Germany

^b Section of Water and Soil (II 2.1), German Environment Agency, Wörlitzer Platz 1, 06844 Dessau-Roßlau, Germany

^c TZW: DVGW-Technologiezentrum Wasser, Karlsruher Straße 84, 76139 Karlsruhe, Germany

^d Chair of Urban Water Systems Engineering, Technical University of Munich, Am Coulombwall 3, 85748 Garching, Germany

^e Section of Microbiology of Drinking Water and Swimming Pool Water (II 3.5), German Environment Agency, Heinrich-Heine-Str. 12, 08645 Bad Elster, Germany

^f Department of Environmental Analytical Chemistry, Helmholtz-Centre for Environmental Research – UFZ, Permoserstrasse 15, 04318 Leipzig, Germany

^g Berlin Centre of Competence for Water, Grunewaldstraße 60/61, 10825 Berlin, Germany

^h Institute for Hygiene and Public Health, University Hospital Bonn, Venusberg-Campus 1, 53127 Bonn, Germany

ⁱ Institute of Sanitary and Environmental Engineering, Technical University of Braunschweig, Pockelsstraße 2a, 38106 Braunschweig, Germany

^j Chair of Water Treatment, Technische Universität Berlin, Straße des 17. Juni 135, 10623 Berlin, Germany

*Corresponding author. E-mail: pascal.hasselder@uba.de

 PH, 0009-0004-4896-5976; DZ, 0000-0003-3038-9371

ABSTRACT


Agricultural water reuse is one approach to mitigate water stress. In addition to the minimum requirements, the European water-reuse regulation 2020/741 mandates a risk management approach for agricultural water reuse. In contrast to the microbiological monitoring, the extent of the chemical risk assessment and monitoring is not clearly defined. The resulting complexity of a typical agricultural water-reuse scheme was analyzed. Potentially relevant parameters were identified based on European and German regulatory frameworks, concerning key subjects of protection. An interdisciplinary assessment of efforts and challenges, regarding required analyses, was accomplished, using expertise from recent research investigating agricultural water reuse in Germany. Suggestions were provided for disinfection validation, microbiological monitoring parameters and analytical methods. Additionally, chemical indicator parameters were suggested to address relevant processes during monitoring. Both microbiological and chemical parameters presented analytical challenges, which were described with future needs to support water-reuse implementation. Costs for analyses were estimated using available price information, highlighting the high costs of certain analyses, especially for organic micropollutants. Therefore, analyses need to be further facilitated by the application of process indicators and the implementation of cost-effective, multi-target methods tailored to the requirements of risk management for agricultural water reuse.

Key words: analyses, agriculture, costs, indicators, regulations, reuse

HIGHLIGHTS

- Agricultural water reuse and its regulatory framework require complex analyses.
- Challenges exist regarding microbial and chemical analyses.
- Efforts and costs for analyses were estimated.
- Parameters exist for microbial and chemical monitoring.

GRAPHICAL ABSTRACT

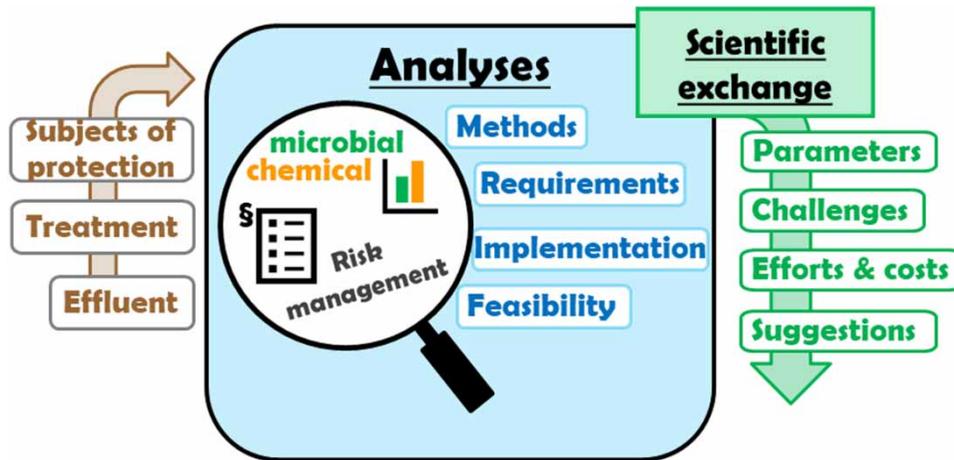

1. INTRODUCTION

Water scarcity and the increasing global demand for sustainable water management have highlighted the potential of water reuse as one important strategy worldwide (UN 2015; UNESCO 2017; Christou *et al.* 2024). In the European Union (EU), this is particularly critical for regions experiencing growing pressure on freshwater resources due to climate change, population growth and high agricultural demands (EU 2013a, 2018). In response, the EU adopted the water-reuse regulation (EU 2020a). This regulation not only defines minimum requirements for reclaimed water but also introduces a mandatory risk management approach, emphasizing the need to safeguard public health, the environment and agricultural production. A comprehensive investigation, bringing together the complex requirements of risk management, analytical capabilities, as well as related costs, is currently missing but is vital to successfully achieve implementation. As shown schematically in Figure 1, this contribution draws on an interdisciplinary assessment based on expertise from recent research projects, focusing on agricultural water reuse in Germany, including monitoring, sampling and analyses. This expertise served as a basis for informed discussions without delving into the details of each project. Additionally, the assessment involves an analysis of requirements considering the regulatory framework and the costs of analysis. These efforts have provided valuable insights into overcoming technical and operational challenges, ensuring the feasibility, safety and consideration of analysis-related costs of agricultural water reuse. More specifically, this paper aims to (1) discuss relevant parameters according to the subjects of protection, (2) identify challenges related to monitoring and analytical methods, (3) assess the associated efforts of monitoring and implementation and (4) suggest parameters for water-reuse monitoring.

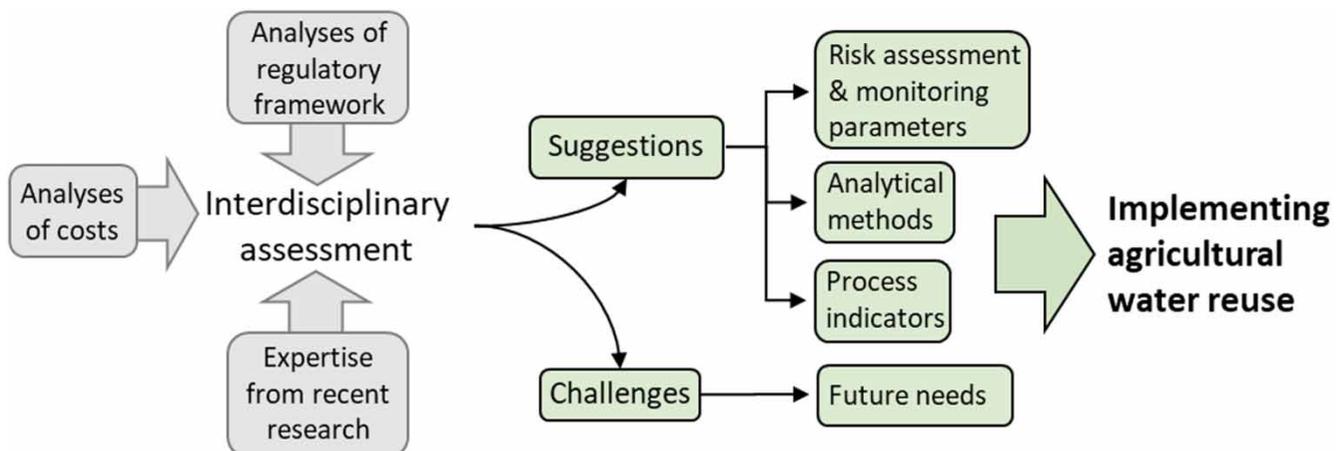


Figure 1 | Conceptual diagram showing the inputs to the interdisciplinary assessment (gray) and achieved outputs (green).

By sharing these findings, we hope to contribute to further facilitating the implementation of water-reuse projects, not only in Germany but also in other EU member states.

2. SURVEILLANCE OF AGRICULTURAL WATER REUSE

2.1. Regulatory framework

The EU water-reuse regulation (EU 2020a) distinguishes between four water quality classes A to D, covering the irrigation of fresh produce that is consumed raw (class A) to the irrigation of non-food crops (class D). Site-specific health and environmental risks need to be addressed in a risk management plan, as outlined in the EU regulation and the related delegated regulation (EU 2024a). While the EU water-reuse regulation (EU 2020a) applies directly in all participating member states, it is not the only relevant legislation but rather closes a gap between the existing environmental policies and those for food safety. The Urban Wastewater Treatment Directive (EU 1991) sets standards for the treatment process and the discharge of treated effluent. Its revised version (EU 2024b) also sets goals for advanced treatment, aiming at the elimination of micropollutants for wastewater treatment plants (WWTPs). Any water-reuse application needs to comply with the Water Framework Directive's (EU 2000) principle of non-deterioration, the Groundwater Directive's EU-wide groundwater quality standards (EU 2006), as well as the Environmental Quality Standards for surface waters (EU 2013b). Additional quality standards are expected as part of the revision of the EU water directives and are likely to include quality standards for pharmaceuticals in groundwater (EU 2022a). Further, the Nitrates Directive (EU 2008), the Bathing Water Directive (EU 2014) and the Drinking Water Directive (EU 2020b) may need to be considered in relation to the site-specific situation. In addition, there is relevant EU food (and feed) hygiene legislation as well as related documents. Depending on the type of irrigated produce, relevant requirements include those on the hygiene of foodstuff (EU 2004), feed hygiene (EU 2022b), microbiological criteria for foodstuff (EU 2020c), maximum contaminants in foodstuff (EU 2023), levels of pesticides in food and feed (EU 2005), use of sewage sludge (EU 1986) and the protection of animal health (EU 2009a, 2009b).

For the German context, there is corresponding national legislation; e.g. the provisions of the EU Groundwater Directive (EU 2006) are implemented in the German Groundwater Ordinance (DE 2010). Additionally, in Germany, the Federal Soil Protection and Contaminated Sites Ordinance (DE 2021) sets out precautionary values for inorganic and organic substances. Relevant norms relate to 'Hygienic concerns of irrigation water' (DIN 1999), 'Testing and evaluation of water for irrigation' (DIN 2009) and 'Guidelines for treated wastewater use for irrigation projects' (ISO 2020). The German Working Group on water issues of the Federal States and the Federal Government (LAWA) has published recommendations for a national regulatory framework to implement the EU regulation on water reuse (LAWA 2022). Respective legal provisions are currently under preparation. In addition, the German network of experts for water, wastewater and waste (DWA) is in the process of finalizing national guidelines that describe the technical requirements for agricultural and urban irrigation with reclaimed water (DWA in progress).

2.2. Water reuse system and analyses for risk management

The identification of hazards, exposure routes and the relevant subjects of protection enables one to initially assess risks before deciding on measures of risk management and a regular monitoring program. Risk management is connected to the entire reuse system, including the sampling points (SP) 1 to 7, schematically shown in Figure 2.

Conventional wastewater treatment is a key process for water reuse. Besides households, indirect industrial dischargers contribute to the WWTP inflow at SP 1. For the initial risk assessment, the evaluation of indirect dischargers, therefore, provides valuable information for sampling at SP 2 and the extent of the analyses. Advanced treatment (SP 3) can vary. Under the EU water-reuse regulation (EU 2020a), agricultural water reuse requires at least disinfection, while the highest quality class also mandates filtration. Additionally, the removal of chemical pollutants, such as organic micropollutants (OMPs), is required. An established solution is the use of activated carbon or ozonation (Jekel *et al.* 2015).

Subsequently, the reclaimed water is transported before being irrigated directly or stored *a priori*. The intermediate storage offers the possibility of balancing out fluctuations in irrigation demands and ensuring a continuous water supply for agriculture. Moreover, mixing in water from other sources could be optionally used to manage water quality. Such a process must be implemented in risk management accordingly and might require additional analyses. Although storage is not designated as a sampling point in the monitoring framework, analyzing water quality during storage can provide valuable insights into microbial dynamics, such as the potential regrowth of certain bacteria. Monitoring the point of use (SP 4) enables the assessment of the final reclaimed water quality and the prevention of the subsequent subjects of protection from potential hazards.

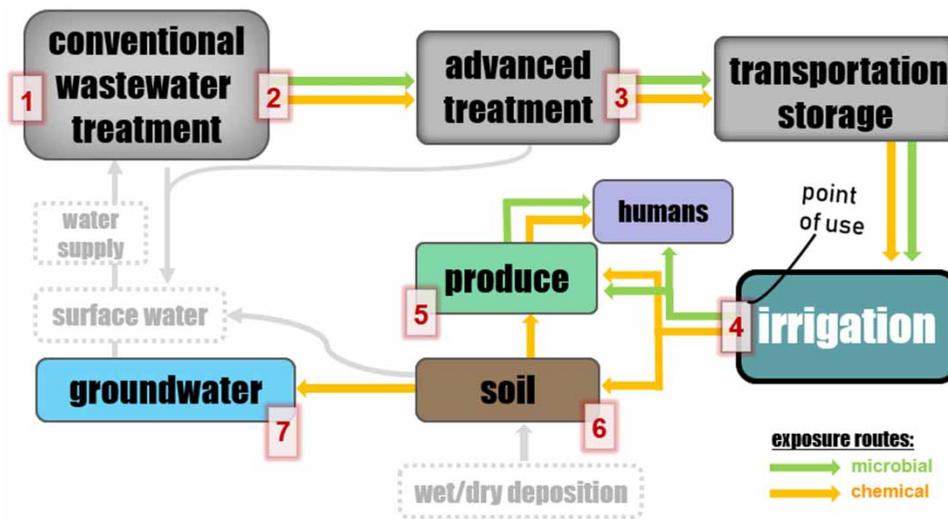


Figure 2 | Typical water-reuse scheme with relevant treatment processes, media and related pathways that have been investigated, indicated with green arrows for microbiological and orange arrows for chemical transfer. The sampling points for monitoring are indicated by 1–7 in red boxes. Gray arrows and dotted boxes indicate transfer routes outside the investigated scope.

Workers might be exposed to pathogens, directly by irrigation water or aerosol inhalation (SP 4). Consumption of produce by humans or animals is a potential exposure route for contaminants. Related risks can be assessed at SP 5.

Compounds added to soils (SP 6) may exhibit different behavior. Besides physico-chemical properties, site characteristics, such as soil type, climate conditions, cultivated crops and irrigation volumes, determine their fate. While there is a risk of long-lasting soil pollution with persistent contaminants adsorbing to soil, mobile substances might be transferred to groundwater bodies (SP 7). Adequate risk management shall prevent groundwater deterioration and soil contamination, thereby protecting surface waters from contamination by surface run-off. Surface waters and water supply are not part of the presented monitoring concept here. Nevertheless, both might be of concern in some cases of agricultural water reuse. Microbial agents may affect soils and related subjects as well but are not part of the presented contribution.

3. RELEVANT PARAMETERS

3.1. Microbiological parameters

Bacteria, viruses, protozoa and parasites occur in the effluents of WWTPs. Some of them bear acute health risks and food-borne outbreaks caused by enteric pathogens are regularly reported worldwide (Wachtel *et al.* 2002; Söderström *et al.* 2008; Carstens *et al.* 2019; Partyka & Bond 2022; Alegbeleye & Sant'Ana 2023). Thus, risks from microbial hazards have to be assessed carefully when using reclaimed water for irrigation. For the highest quality class of irrigation water, the EU water-reuse regulation (EU 2020a) requests evidence for the effective removal of bacteria, viruses and protozoa (validation monitoring). It is based on indicator organisms that show representative behavior during the treatment (thus comparable to pathogens), relatively high abundance (to minimize sample volume) and relatively simple quantification (relying on standard cultivation-based methods). The reduction is reported as a \log_{10} reduction (log-removal value). Sampling the incoming wastewater (SP 1) and the reclaimed water after disinfection enables us to determine the efficacy of the entire treatment train and thereby evidence the requested log-removal values.

The EU water-reuse regulation (EU 2020a) requires measuring total coliphages (somatic coliphages and f-specific coliphages) or at least one of them. The results indicate that somatic coliphages yield lower log removals in ultrafiltration, whereas f-specific coliphages yield lower log removals in UV disinfection and performic acid-based disinfection than the respective other type of coliphages (Gnirss *et al.* 2015; Ho *et al.* 2024). In Germany, it will be recommended to assess both coliphages individually (DWA in progress). *Clostridium perfringens* spores are used as a surrogate for protozoa. Additionally, regular monitoring of *Escherichia coli*, as the most common fecal indicator bacterium, is required for all water quality classes. Besides, regular monitoring of *Legionella* spp. is mandatory in the case of aerosol formation and Helminth oocysts are foreseen as a surrogate for parasites in the case of irrigation of pastures or fodder for livestock.

In Germany, there are recommendations to include *Enterococcus* spp. into the regular monitoring (based on the respective standard (DIN 1999)). Some stakeholders also suggest applying validation monitoring to water quality classes B and C for food crop irrigation (DWA in progress; LAWA 2022). Standard methods for the relevant parameters (partly requested by the EU regulation) are listed in Table 1.

Depending on the source water quality and the intended use of the reclaimed water, additional monitoring parameters may be relevant to assess long-term effects, including the presence of antibiotic-resistant bacteria (ARB) and antibiotic resistance genes (ARG). ARG can persist in treated water and spread through wastewater discharge (Stange *et al.* 2019; Sauter *et al.* 2021), potentially contaminating surface waters and agricultural environments. While some studies show that irrigation influences ARG levels in plants (Cerqueira *et al.* 2019), others show a minimal impact (Shamsizadeh *et al.* 2021; Liu *et al.* 2022), highlighting knowledge gaps. Insufficient treatment may allow antibiotic residues, ARB and ARG, to persist and spread via mobile genetic elements. The EU has recognized this issue, mandating in the revision of the Urban Wastewater Treatment Directive (EU 2024b) monitoring of resistance parameters in a large WWTP by 2025, emphasizing the need for improved assessment.

3.2. Chemical parameters

The EU water-reuse regulation (EU 2020a) and the associated delegated regulation (EU 2024a) do not have a standard list of relevant chemical parameters, which must be assessed according to site-specific conditions in the mandatory risk management and are more likely to represent chronic risks. The relevant parameters, specified in EU and German legislation relating to wastewater treatment, reclaimed water, groundwater and soil protection, are summarized in Table 2. Partly, substances that are included in the listed regulatory framework are excluded from Table 2 due to their lack of relevance for water reuse. For example, volatile hydrocarbons are rather important at contaminated sites. The explicit decisions on all excluded parameters are documented in the Supplementary information.

3.2.1. Treated wastewater

The EU water-reuse regulation (EU 2020a) specifies minimum requirements for the quality of the reclaimed water, including biological oxygen demand (BOD), total suspended solids (TSS) and turbidity. Beyond that, typical operational parameters for

Table 1 | List of microbiological parameters with respective methods of detection, besides the EU requirements with regard to SPs indicated in Figure 2

Group	Parameter	EU requirements and respective SPs in Figure 1	Standard methods
Bacteria	<i>E. coli</i>	Quality class A: removal exceeds 5 log units between SP 1 and SP 3 for the validation of the treatment train Quality classes A–D: ≤ 10 , ≤ 100 , $\leq 1,000$ and $\leq 10,000$ cfu/100 mL in weekly samples from SP 3 or 4	DIN EN ISO 9308-1 (2017) DIN EN ISO 9308-2 (2014) DIN EN ISO 9308-3 (1999)
	<i>Enterococci</i>	Not required in the EU but recommended in Germany (DIN 1999)	DIN EN ISO 7899-1 (1999) DIN EN ISO 7899-2 (2000)
	<i>Legionella</i> spp.	$< 1,000$ cfu/L in biweekly samples from SP 4, and only in the case of aerosol formation	DIN EN ISO 11731 (2019)
Protozoa	<i>C. parvum</i> spores	Quality class A: Removal exceeds 4 log units between SP 1 and 3 for the validation of the treatment train	DIN EN ISO 14189 (2016)
Viruses	Somatic coliphages	Quality class A: Removal exceeds 6 log units between SP 1 and 3 for the validation of the treatment train	DIN EN ISO 10705-2 (2002)
	F-specific coliphages	Quality class A: Removal exceeds 6 log units for the validation between SP 1 and 3 for the validation of the treatment train	ISO 10705-1 (1995)
Parasites	Helminth oocysts	< 1 egg/L for the irrigation of pastures or forage	No standard available

The purpose of the analyses for risk management is described by either regularly sampling or validation for Quality class A.

Table 2 | Chemical parameters from the regulatory framework that are potentially relevant for agricultural water reuse

	EU urban wastewater treatment directive (recast) (EU 2024b)	EU water reuse regulation (EU 2020a)	EU groundwater directive (EU 2006)	German groundwater ordinance (DE 2010)	German soil protection ordinance (DE 2021)	Testing and evaluation of water for irrigation (DIN 2009)	International standard for water reuse for irrigation (ISO 2020)
Operational							
BOD	L	L					L
Chemical oxygen demand (COD)	L						L
EC			L	L		L	L
pH				L	L	L	L
TOC ^a	L				L		
TSS	L	L		L		L	L
Turbidity ^b		L					
Anions							
Chloride			L	L		L	L
Sulfate			L	L			
Cyanide							
Heavy metals and other elements							
Antimony					L		
Arsenic			L	L	L	L	
Boron				L	L	L	L
Cadmium	L		L	L	L	L	L
Chromium				L	L	L	L
Cobalt				L	L		L
Copper				L	L	L	L
Lead	L		L	L	L	L	L
Mercury	L		L	L	L	L	L
Molybdenum					L	L	L
Nickel	L			L	L	L	L
Selenium					L		L
Sodium						L	L
Thallium				L	L		
Vanadium				L			L
Zinc				L	L	L	L
Nutrients							
Total nitrogen	L						
Total phosphorous	L						
Corrosion inhibitors							
1H-Benzotriazole	L						
4- and 5-Methylbenzotriazole	L						
Industrial							
PFAS ₄			P				

(Continued.)

Table 2 | Continued

	EU urban wastewater treatment directive (recast) (EU 2024b)	EU water reuse regulation (EU 2020a)	EU groundwater directive (EU 2006)	German groundwater ordinance (DE 2010)	German soil protection ordinance (DE 2021)	Testing and evaluation of water for irrigation (DIN 2009)	International standard for water reuse for irrigation (ISO 2020)
PFAS ₂₀			P				
PFAS ₂₄			P				
PAH ₁₆					L		
PCB ₆ and PCB 118					L		
Pharmaceuticals and personal care products							
Amisulpride	L						
Candesartan	L						
Carbamazepine	L		P				
Citalopram	L						
Clarithromycin	L						
Diclofenac	L						
Hydrochlorothiazide	L						
Irbesartan	L						
Metoprolol	L						
Primidone			P				
Sulfamethoxazole			P				
Venlafaxine	L						

L indicates current legislation, P indicates the current official proposals for amending the GWD (EU 2022a, 2024c).

^aTOC may replace COD in water-reuse contexts because the standard method is more sensitive. TOC and COD can be correlated in a specific water matrix.

^bTurbidity may replace TSS in water-reuse contexts when filtration is applied. In this case, turbidity is more sensitive. TSS and turbidity can be correlated in a specific water matrix.

water quality surveillance and treatment process control are total organic carbon (TOC), UV absorbance and transmittance at 254 nm, pH and electrical conductivity (EC). Except for UV absorbance and transmittance, the operational parameters are widely covered in the regulatory context (not in the EU water-reuse regulation).

Among the inorganic parameters in Table 2, heavy metals are the most prominent. Different removal mechanisms in WWTPs leave low concentrations in WWTP effluents. Compared to lead, mercury and cadmium, lower but still moderate-to-high removals were reported for nickel in a German monitoring of the WWTP (UBA 2020). Irrigation with reclaimed water might be a potential source of the more mobile heavy metals. Nutrients, such as nitrogen and phosphorus, are common surveillance parameters for the discharge of treated wastewater, as it is obliged by the EU urban wastewater treatment directive (EU 1991).

OMPs in wastewater originate from daily life applications and products, such as pharmaceuticals, personal care, material additives and many more (Loos *et al.* 2013; Finckh *et al.* 2022). Industrial discharge is another potential source of organic contaminants in wastewater and might lead to elevated concentrations of individual chemicals. Polyaromatic hydrocarbons (PAHs) and polychlorinated biphenyls (PCBs) are persistent and hydrophobic contaminants. The so-called 16 EPA-PAH (PAH₁₆), a list proposed by the US Environmental Protection Agency (EPA), is typically analyzed as a representative PAH indicator. Likewise, six different congeners of PCB (PCB₆) are commonly analyzed, besides the congener PCB 118, indicating dioxin-like PCB. In a Germany-wide monitoring of 49 conventional WWTPs, a good PAH elimination to a median effluent concentration below 10 ng/L was reported (UBA 2020). However, specific industries might discharge higher concentrations. In an industrial area in Italy, residual PAH and PCB concentrations up to several hundred ng/L were measured in WWTP effluents after advanced treatment, such as ozonation and activated carbon or after dilution of the treated wastewater with river water (Bruzzoniti *et al.* 2024). Pesticides, biocides and insecticides (in the following summarized as pesticides) in

wastewater originate from agricultural application or from urban run-off, for example, after release from construction materials (Jekel *et al.* 2015; UBA 2020). Although WWTP effluents may contain more pesticides than agricultural surface run-off, the latter contains higher loads (Masoner *et al.* 2023). Per- and polyfluoroalkyl substances (PFAS) originate from a wide range of applications in daily life products and industry (Glüge *et al.* 2020), are highly persistent and ubiquitously appear in the environment (Buck *et al.* 2011). Perfluorooctanesulfonic acid (PFOS), for example, partly adsorbs to activated sludge, while others, such as perfluorooctanoic acid (PFOA), persist in conventional wastewater treatment, causing relevant concentrations in WWTP effluents (Schultz *et al.* 2006; Sinclair & Kannan 2006; UBA 2020). The environmental relevance of trifluoroacetic acid (TFA), the final transformation product of many PFAS, is still debated (Arp *et al.* 2024). Secondary effluents or municipal WWTPs are key point sources for a large number of OMP used in health care and households, such as pharmaceuticals, corrosion inhibitors, sweeteners and many more (Loos *et al.* 2013; Finckh *et al.* 2022). While so far hardly addressed in the regulatory framework, the recast of the EU Urban wastewater treatment directive (EU 2024b) provides a list of 12 OMPs to evidence advanced treatment efficacy. This list mainly considers OMPs that originate from households but not from industry, such as PAH, PCB and PFAS. The German Centre for Micropollutants provides a list of 21 relevant OMPs based on the assessment of an expert committee (UBA 2025).

3.2.2. Soil

The German soil protection ordinance (DE 2021) provides precautionary values for the respective parameters that are listed in Table 2. In addition to the precautionary values, threshold values prescribe remediation measures if exceeded. Threshold values are provided for various exposure routes, such as from soil to groundwater, plants or humans. Since these thresholds primarily concern contaminated sites, they are not included in Table 2.

Heavy metals potentially cause long-term soil contamination. With respect to expected heavy metal concentrations in WWTP effluents, risks of soil contamination related to agricultural water reuse are assumed to be low, while nickel, lead, cadmium and mercury should be assessed depending on effluent characteristics (UBA 2016; LAWA 2022). EC of soil extracts is used as a surrogate parameter to monitor soil salinization according to technical guidelines for testing and evaluating water for irrigation (ISO 2009). Imbalance of sodium in relation to calcium and magnesium (sodium adsorption ratio) may cause disaggregation and slaking in respective soils.

Hydrophobic and persistent organic compounds are prone to adsorption and relevant parameters regarding long-term soil contamination. Examples are PAH and PCB with very high retardation factors (Estoppey *et al.* 2024). Elevated PAH and PCB soil concentrations were reported for a site in Tunisia, which is long term irrigated with secondary effluents from municipal and industrial wastewater (Haddaoui *et al.* 2016). Depositions of diffuse PAH releases from combustion processes are the main source of PAH accumulation in top soils, while releases from soils mainly occur with run-off and concomitant particle transport (Gocht *et al.* 2007). For PAH₁₆ and PCB₆, precautionary values are provided in the German soil protection ordinance (DE 2021). From various PFAS, the long-chain PFAS are relevant regarding soil contamination (Rasmusson & Fagerlund 2024). The German soil protection ordinance (DE 2021) does not provide precautionary values or maximum yearly loads for PFAS. Different studies demonstrated the occurrence of various OMP in soils originating from agricultural water reuse (Paz *et al.* 2016; Ben Mordechay *et al.* 2021; Kodešová *et al.* 2024; Ahmadi *et al.* 2025). So far, no regulatory thresholds exist for maximum concentrations of such OMPs in soils or maximum yearly loads.

3.2.3. Groundwater

Vertical mass transport in soils occurs when mass input exceeds attenuation or the distribution equilibrium between the phases of the soil–water–air system leads to a transfer into the water phase, while the soil water content leads to water percolation. Generally, persistent and mobile substances bear a high potential to reach groundwaters and pass river bank filtration (Bautista *et al.* 2024; Muschket *et al.* 2024).

Besides several typical inorganic parameters and site characteristics such as pH, the German groundwater ordinance (DE 2010) considers the pesticides of substance classes and their metabolites, as well as nutrients. While pesticide concentrations are typically low in treated wastewater (UBA 2020; Finckh *et al.* 2022), many of them are used intentionally in agriculture. In the Supplementary Information, seven exemplary pesticides show that the application in a hypothetical scenario of 300 mm irrigation volume and a concentration of 1 µg/L in the irrigation water would be, in most cases, less than 1% compared to the instructions for use. Thus, monitoring pesticides in agricultural environments might be superimposed by factors other than water reuse. However, pesticides that are not used in agriculture but are present in WWTP effluents might be relevant.

The EU working group on groundwater published a voluntary watchlist for groundwater, which considers two PFAS (perfluorododecanoic acid and perfluoroundecanoic acid) and nine pharmaceutical substances (clopidol, crotamiton, diatrizoic acid, sulfadiazine, primidone, sotalol, ibuprofen, erythromycin, and clarithromycin) (EU 2019). In the EU, there is an ongoing negotiation on amending the groundwater directive. In detail, thresholds for the sums of 4, 20 and 24 PFAS (PFAS₄, PFAS₂₀ and PFAS₂₄), carbamazepine, sulfamethoxazole and primidone are considered (EU 2022a, 2024c).

3.2.4. Produce

Environmental factors, such as the level of exposure or soil organic matter, impact the amount of OMP uptake by plants; however, a general process description remains uncertain since the uptake varies from plant to plant and from substance to substance even in similar environments (Fernandes *et al.* 2024). Several studies reported high uptake of carbamazepine by plants (Ben Mordechay *et al.* 2021; García-Valverde *et al.* 2023; Fernandes *et al.* 2024). For children younger than 11 months, the estimated daily intake of carbamazepine may exceed the acceptable daily intake if secondary effluent was used for irrigation, but not if advanced water treatment was done (Benelhadj *et al.* 2024). Ahmadi *et al.* (2025) found detectable but, in general, low loads of 18 OMPs in agricultural produce irrigated with different treated waters, i.e. reclaimed water according to EU minimum requirements, advanced treated water and tap water. None of the measured OMP exceeded the acceptable daily intake for children or adults assuming a vegetarian diet, irrespective of irrigation water quality. The highest hazard quotients were found for hydrochlorothiazide and carbamazepine due to the very low acceptable daily intake and the elevated load in agricultural produce, respectively. Fernandes *et al.* (2024) reviewed the uptake of OMP by plants in soil-plant and hydroponic systems, considering that many OMPs form various substance classes and concluded that associated human health risks are below the recognized thresholds of acceptable daily intake.

4. CHALLENGES, EFFORTS AND COSTS RELATED TO ANALYSES

The implementation of monitoring programs itself might be challenging for sampling requirements in terms of time and techniques. Related efforts are described in the Supplementary Information.

4.1. Microbiological analyses

4.1.1. Analytical challenges

During monitoring campaigns as part of the German research activities, the influents of 10 different WWTPs were compiled and analyzed for the parameters required for the validation monitoring, as mandated by the EU water-reuse regulation (Seis *et al.* 2024).

Coliphages in those WWTP influents occurred at concentrations that are too low for the validation since even near-complete elimination does not provide sufficient decimal logarithmic units (Seis *et al.* 2024). Therefore, large volumes of samples after the disinfection might be necessary in order to sufficiently lower the quantification limit. However, that may complicate the transportation and processing of the samples. Thus, on-site filtration methods have been suggested, e.g. the VIRADEL method (Fout *et al.* 2015; Betancourt 2023) or the hollow fiber ultrafiltration method (Hill *et al.* 2009), which is not routinely established and standardized in German laboratories. While dosing coliphages directly into the influent of a WWTP is not feasible, spiking MS2 and phiX174 phages before disinfection can serve as an alternative method to evaluate log removal credits for phages, as shown by Ho *et al.* (2024). These experiments allow for the controlled assessment of treatment performance by simulating pathogen concentrations under defined conditions.

Water constituents and associated flora in the irrigation system interfere with culture-based quantification methods of *Legionella* spp. A further developed method (LANUV 2019), therefore, provides a solution and performs very well in the research activities. It includes pretreatments, such as adding antibiotics, while using varying cultivation media and multiple batches help to achieve evaluable results.

Different methods for the detection of helminth oocysts were described (Mahapatra *et al.* 2022). However, no international standard method is available, and quantification is still challenging (Arthur 2021). Concerning commercial laboratories, an analytical gap for helminth oocysts in water was identified, leaving a discrepancy between the legal requirements and the available analytical capabilities.

4.1.2. Efforts and costs

Alongside the German research activities, price information for the analyses was gathered and used to estimate costs of a realistic analysis program for agricultural water reuse. Considering the one-time process validation, the parameters *E. coli*, *C. perfringens* spores, as well as somatic and f-specific (total) coliphages, have to be analyzed. For example, analyzing 10 samples each from the two SPs at the WWTP influent and after the disinfection, considering these parameter costs between 4,800 and 11,000 Euros according to typical costs listed in Table 3. Total microbial monitoring costs for one irrigation season in Germany (20 weeks assumed) will range from 2,000 to 4,100 € (weekly: *E. coli*, *Enterococci*; biweekly: *Legionella* spp). The costs for the analyses of helminth oocysts could not be included because no laboratory service could be found. Unlike bacterial parameters, which are enriched using membrane filtration in standardized methods, analyzing coliphages becomes significantly more labor-intensive when larger sample volumes are required. Additional costs for services, such as sampling and logistics, as well as enrichment, are not included.

4.2. Chemical analyses

4.2.1. Analytical challenges

Very low concentrations of relevant compounds in reclaimed water can make enrichment necessary in order to reach sufficient quantification limits. In addition, separating target compounds from unwanted matrix, e.g. via solid phase extraction, is accompanied by extensive work, considering the extraction procedure itself and quality control of the applied method. If it is required for risk management, extraction from soil and plant samples, in particular, is accompanied by complex sample matrices that might negatively impact the quality of analyses. However, it is necessary to reduce disturbance by a matrix (Montemurro *et al.* 2019), and when the target compounds exhibit a polarity comparable to that of the unwanted matrix, separation becomes difficult. Regarding soil sample extraction, the time of soil sampling might also be relevant. Without leaching during irrigation, at the end of the irrigation season, salt contents in soils are the highest, which might negatively affect analyses, especially for polar analytes (Müller *et al.* 2020).

4.2.2. Efforts and costs

Based on price information gathered during the involved research activities, costs for analyses were estimated and provided in the Supplementary Information. It is noteworthy that analyses of requirements for agricultural water reuse are not always covered by typical parameter sets of laboratory services. Parameter sets, such as PAH₁₆, PCB₆, PFAS₂₀ and heavy metals, are often based on regulatory requirements, e.g. the drinking water ordinance (DE 2023) or soil protection ordinance (DE 2021). Analyses of individual OMPs are typically more expensive than those of parameter sets. However, for many of the OMP listed in Table 2, the only option was to estimate a price between 220 and 550 Euros based on price information for other OMPs and for individual analyses.

Readily available data from regular WWTP surveillance might be helpful to reduce the extent of analyses. At least data regarding nitrogen and phosphorus, many of the operational parameters and, to a certain extent, heavy metals are likely available from regular WWTP surveillance. Depending on the potential site-specific risks, the extent of analyses that are required

Table 3 | Microbiological parameters and estimated related costs for one season with 20 weeks of irrigation

Parameter	Costs for analyses (€)		
	One sample	Complete validation	20 weeks of regular monitoring
<i>E. coli</i>	30–90	600–1,800	600–1,800
<i>Enterococci</i>	30–50	–	600–1,000
<i>Legionella</i> spp.	80–130	–	800–1,300
<i>C. perfringens</i> spores	30–60	600–1,200	–
Somatic coliphages	90–200	1,800–4,000	–
F-specific coliphages	90–200	1,800–4,000	–
Helminths-oocysts	Not available	–	Not available

Calculations include 10 samples each from SP 1 and SP 3 for the validation and weekly (*E. coli* and *Enterococci*) or biweekly (*Legionella*) samples from SP 4 as mandated by the EU water-reuse regulation (EU 2020a).

for risk management, as well as for regular monitoring, varies. The estimated costs for two theoretical scenarios with higher/lower parameters are shown in Figure 3. For the risk assessment (to be assessed at SP 2, WWTP effluent), the scenario 'high' covers all parameters as shown in Table 2. The scenario 'low' includes PAH₁₆, PCB₆, PFAS₂₀ and six OMPs while relying on available data regarding the operational parameters, nutrients and heavy metals. OMP analyses by far account for the biggest share of total costs. Considering both scenarios, the minimum and maximum costs for analyses of one sample, risk assessment analyses amount to approximately 1,600–3,400 and 4,500–9,300 Euros, respectively. However, actual costs may vary to a great extent. In consideration of the future requirements for wastewater treatment (EU 2024b), WWTPs above 150,000 p.e. (and those in areas at risk) will have to involve advanced treatment for OMP removal. In such cases, related costs would not contribute to the costs for water reuse, since they would be incurred, irrespective of whether the reclaimed water is used for agriculture. Depending on the WWTP influent and effluent quality, more or fewer parameters might be relevant for risk assessment. Since the risk assessment is carried out once, further aspects, such as the irrigated area and cultivated crops, will also determine how substantial the costs are for a specific project.

Similarly, two theoretical scenarios, 'low' and 'high', were applied for the regular monitoring. Each considers the four monitoring objects' OMP removal during advanced treatment, transfer to produce, accumulation in soil and transfer to groundwater (Table 4) with varying amounts of OMP contributing to the extent of analyses. Since price information was not available for the analyses of an appropriate set of PFAS in soil, the information for the analysis of PFAS₂₀ in water was applied. The total costs are highly dependent on how frequently analyses are done. The following assumptions are made to estimate the costs for one year based on data shown in Figure 3: analyses for advanced treatment are done monthly during 20 weeks of irrigation, transfer to produce and groundwater both are monitored yearly, and soil monitoring is done

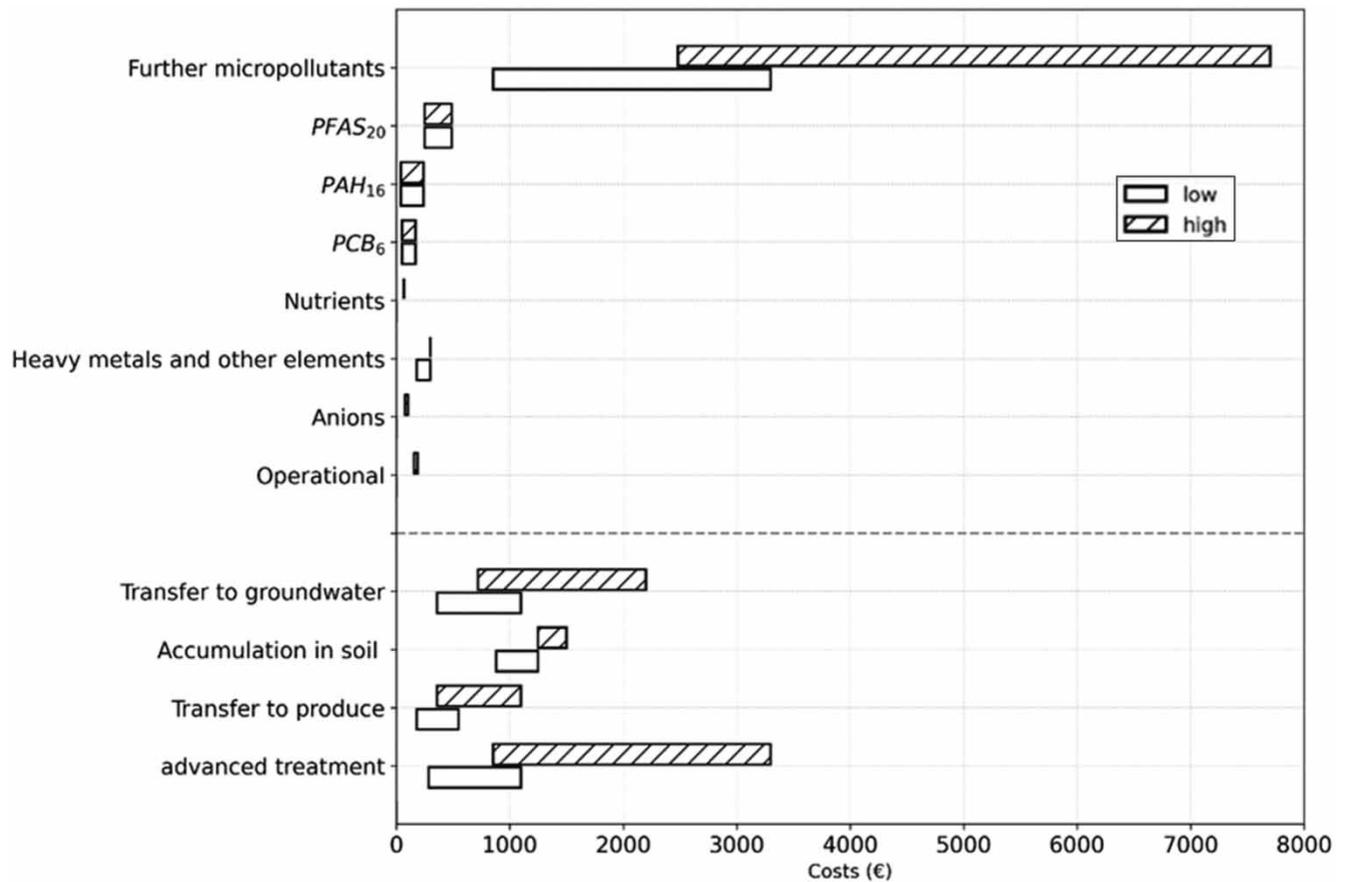


Figure 3 | Minimum and maximum estimated costs for one analysis each are shown as bars for two scenarios, 'low' and 'high'. Above the dashed line: analyses for the risk assessment whereby scenario 'low' includes PAH₁₆, PCB₆, PFAS₂₀ and six OMPs; scenario 'high' includes all parameters from Table 2. Below the dashed line: costs for regular monitoring according to the processes provided in Table 4.

Table 4 | Proposed indicator parameters for the monitoring of processes related to risks associated with agricultural water reuse at SP indicated in Figure 2

Process	SP	Parameter requirements	Indicator parameters
OMP removal	Advanced treatment (SP 3) or water outlet (SP 4)	Different for moderate and high removals in WWTP and established treatment technologies, such as activated carbon and ozonation	UV absorbance at 254 nm, dissolved organic carbon Substances from the urban wastewater treatment directive (EU 2024b) listed in Table 2
Transfer to produce	Produce (SP 5)	High transfer to produce	Carbamazepine, hydrochlorothiazide, gabapentin
Accumulation in soil	Soil (SP 6)	High K_d or K_{oc} and persistence	Carbamazepine, heavy metals, PAH ₁₆ , PCB ₆ , PFOA, PFOS
Transfer to groundwater	Ground water (SP 7)	High mobility and persistence	Diatrizoic acid, primidone, gabapentin

every five years (costs divided by five). In that case, the minimum and maximum total costs for one year of monitoring amount to 2,100–7,400 and 5,600–20,100 Euros for the ‘low’ and ‘high’ scenarios, respectively. This discrepancy reveals that the most uncertain point of expensive OMP analyses is the main variable in these scenarios. A more detailed documentation on the methodology for the presented cost calculation is provided in the Supplementary Information. Since regular monitoring is an ongoing expense, a limited but at the same time meaningful set of parameters seems to be important.

5. SUGGESTED ANALYSES FOR RISK MANAGEMENT

5.1. Microbiological analyses

The parameter *E. coli* is widely used as the primary indicator for fecal contamination in water-reuse applications. It is easy to measure, comes in high concentrations in wastewater and has a well-established correlation with the removal of other enteric pathogens, making it a reliable and cost-effective parameter for validating the effectiveness of treatment processes and for routine monitoring. Coliform bacteria are typically measured alongside *E. coli* as they provide additional information without additional costs. The presence of coliforms can help identify issues with microbial control, as these bacteria are often more resilient. *Enterococcus* spp. exhibit even greater environmental persistence (Naclerio *et al.* 2008; World Health Organization 2008; Schneeberger *et al.* 2015). Therefore, *Enterococci*, which are not effectively eliminated during wastewater treatment, might pose a health threat to humans and animals. Thus, including these parameters in the validation process is important. Both *Enterococci* and coliforms might proliferate in water if conditions allow, signaling the potential for further contamination risks during storage. For routine monitoring, these parameters are useful for precautionary consumer health protection.

The concentration and detection frequency of *Salmonella* in municipal raw wastewater vary, depending on regional factors and specific conditions at WWTPs (Kinde *et al.* 1997; Espigares *et al.* 2006). *Salmonella* is the most common cause of food-borne-disease outbreaks in the EU (EFSA 2018). Liu *et al.* (2018) reported related disease outbreaks after irrigation with surface water, indicating the relevance. The reduction of *E. coli* in wastewater treatment is used as an indicator for the simultaneous reduction of other fecal pathogens, including *Salmonella* spp. However, the survival and removal rates of different microorganisms can vary; therefore, risk-based assessments should guide monitoring decisions, taking into account factors such as wastewater origin, treatment methods and intended water reuse. To optimize monitoring efforts while minimizing costs, we propose an adaptive analysis approach during validation. This would include testing *Salmonella* spp. as an additional parameter during the one-time process validation, which would not require additional sampling. If *Salmonella* is not detected in the validation phase, further testing can be omitted. However, if *Salmonella* is detected, further testing should be decided on a case-by-case basis.

Legionella is particularly important to monitor in water systems where aerosols may be generated. *Legionella* can regrow in water under certain conditions and the inhalation of contaminated aerosols can pose serious health risks. As stipulated by the EU regulation (EU 2020a), monitoring *Legionella* is essential when aerosols are a concern.

C. perfringens spore is a suitable and important parameter for the validation of disinfection as it is comparably resistant (Ho *et al.* 2024) while it likely occurs in concentrations high enough to achieve log removal values required by the EU water-reuse regulation (EU 2020a; Seis *et al.* 2024).

Coliphages are a relevant surrogate for human pathogenic viruses, can behave differently than *E. coli* during treatment processes and thus are also a valuable monitoring parameter. Influent concentrations to WWTPs are likely too low to evidence log removal values required by the EU water-reuse regulation (EU 2020a) unless enrichment is applied (Seis *et al.* 2024). According to the EU water-reuse regulation, which requires validation only for quality class A, validation is also considered successful when no coliphages are detected after disinfection following the standard methods listed in Table 1. In turn, any positive detection leads to failure of the validation when influent concentrations are too low to confirm the required log removal values, even if the treatment train could exceed the requirements. Relying solely on the absence of detectable coliphages to validate treatment efficacy requires careful consideration. For such an approach to be deemed valid, the limit of detection or the volume of water tested must be clearly defined and aligned with regulatory requirements. Otherwise, methods for enrichment from larger volumes must be implemented to comply with the sophisticated requirements. Therefore, Seis *et al.* (2024) suggest methods for enrichment by membrane filtration and provide statistical analysis to demonstrate that 90% of validation samples meet or exceed performance targets, as required by the EU water-reuse regulation (EU 2020a). With regard to validation, we emphasize the need to provide feasible and standardized methods, in particular, if sophisticated validation might be extended to water quality classes A, B and C, in Germany, despite the EU recommendations (EU 2020a).

The robust and reliable validation of uncensored log removal credits can be done by improving the limit of detection through sample enrichment or spiking to final disinfection, though this increases sampling effort. To balance this, it is suggested to document validated log removal credits for selected treatment trains in a public register, including operational conditions. These reference plants can then serve as models for replicate plants, where simplified validation monitoring, meeting EU minimum requirements, is sufficient due to the existing confidence in the treatment process (DWA In progress).

5.2. Chemical analyses

An initial risk assessment can be achieved by analyzing representative samples from the WWTP effluent (SP 2). On the basis of reliable site-specific data and in agreement with the risk management plan, the relevant parameters should be selected, as listed in Table 2, potentially complemented by other relevant OMPs. Coherence between risk assessment and monitoring parameters improves overall risk management.

We suggest a set of useful indicators listed in Table 4 for monitoring all the relevant processes and exposure routes indicated in Figure 2: advanced wastewater treatment for OMP elimination, accumulation in soil, transport to or migration with groundwater and plant uptake. However, it must be decided in complementary risk management plans which parameters are relevant in a site-specific scenario.

Monitoring the advanced treatment (SP 3) is crucial to sustain risk management: In case the WWTP already incorporates advanced treatment for OMP elimination, the revised urban wastewater treatment directive (EU 2024b) provides indicator parameters. Additionally, the reduction of UV absorbance at a wavelength of 254 nm and dissolved organic carbon are typical surveillance parameters during advanced treatment and OMP removal, while turbidity can signal anomalies in treatment performance.

Transfer and migration of groundwater matter regarding persistent and mobile substances: Persistent and mobile substances are important with regard to their potential transfer to groundwater and subsequent migration in groundwater bodies (Ternes *et al.* 2007; Dittmann *et al.* 2024). Thus, diatrizoic acid appears to be a useful indicator. Among PFAS, the short-chain and ultra-short-chain PFAS, in particular, tend to stay in the aqueous phase and thereby reach groundwater (Rasmusson & Fagerlund 2024). However, short-chain PFAS are suspected to be ubiquitously present in the atmosphere and deposited with rainfall (Björnsdotter *et al.* 2021). Trifluoroacetic acid is known to form after degradation of pesticides containing C-CF₃ moieties (Joerss *et al.* 2024), leaving it as a rather unprecise parameter for agricultural water-reuse monitoring. Gabapentin was proposed as an indicator because of its persistence, mobility and high abundance (Ahmadi *et al.* 2025; DWA in progress). Primidone was proposed to be amended to the groundwater directive as an indicator for anthropogenic impacts (EU 2022a).

Long-term accumulation in soil mainly concerns persistent substances with high K_d (or K_{OC}): Meeting the criteria of the German soil protection ordinance (DE 2021), heavy metal loads to soil can be readily assessed from reclaimed water analyses. With regard to secondary effluent concentrations and expected irrigation volumes in Germany, risks emanating

from heavy metals were low but not negligible (UBA 2016; LAWA 2022). Other experiences regarding water reuse in a hydroponic system showed that heavy metal concentrations in the irrigation water were below the limit values of the German Drinking Water Ordinance (Bliedung *et al.* 2020). Based on reported PAH (UBA 2020) and PCB (Cybulski *et al.* 2022) concentrations in WWTP effluents, the related risk appears low, but not negligible in industrially influenced catchments (Bruzzoniti *et al.* 2024). Heavy metals, PAH and PCB, should be included in soil monitoring if there is evident concern of elevated concentrations in the reclaimed water. If relevant in the reclaimed water, monitoring PFOA and PFOS is useful since they potentially cause long-term contamination (Jahn *et al.* 2023; Rasmusson & Fagerlund 2024). Carbamazepine is a useful indicator that was often reported to occur in soils after water reuse (Ben Mordechay *et al.* 2021; García-Valverde *et al.* 2023; Kodešová *et al.* 2024).

OMP plant uptake follows complex mechanisms: Thus, it was challenging to propose a definite set of indicators. However, carbamazepine uptake was reported for agricultural water reuse and various types of produce and soils (Ben Mordechay *et al.* 2021; García-Valverde *et al.* 2023; Benelhadj *et al.* 2024; Dittmann *et al.* 2024). It, therefore, appears to be a meaningful indicator. Ultra-short chain PFAS like trifluoroacetic acid and perfluoropropionic acid show a high uptake potential in arugula (*Eruca sativa*) similar to carbamazepine (Seelig *et al.* 2025) but may have other sources than reclaimed water. Gabapentin can be a suitable indicator for water-rich agricultural produce due to its persistent and mobile nature (Ahmadi *et al.* 2025). Ahmadi *et al.* (2025) found that among 18 OMPs, hydrochlorothiazide and carbamazepine were the most critical with respect to acceptable daily intake via agricultural produce.

6. CONCLUSIONS

Agricultural water reuse is embedded in a complex regulatory framework, potentially requiring numerous microbiological and chemical parameters. This, and the requirement to decide on the extent of analyses according to site-specific conditions, pose a challenge to practitioners. For many parameters, analytical standard methods are available and services are provided by laboratories according to current legislative requirements, but, for some parameters, a lack could be identified. The use of chemical process indicators helps to representatively monitor exposure routes and reduce efforts.

With regard to the microbiological parameters, remaining analytical challenges need to be clarified and solutions must be implemented into standardized methods, such as the enrichment of coliphages from greater sample volumes and testing for helminth oocysts. A feasible and representative strategy for risk assessment and monitoring supports the work of the responsible authorities and practitioners. The findings are thus valuable input for the regulatory development. Further challenges arise in the assessment of those OMP that are not yet regulated. A better understanding of their eco- and human toxicology is needed. In light of uncertainty, the presence of OMP should be prevented or minimized following the precautionary principle.

The elaborated costs for extensive microbiological and chemical analyses are unique compared to conventional irrigation and contribute to complex economic constraints. Whenever conventional water is available at low costs, this circumstance will decrease the competitiveness of water reclamation. Thus, keeping costs for analyses at reasonable levels is one remaining challenge in order to make agricultural water reuse economically feasible. OMP analyses, in particular, may drastically increase costs as long as there is no standard list for which laboratories implement standard procedures. Confining to a few cost-efficient analytical multi-target methods tailored to the requirements of agricultural water reuse likely promotes the implementation of water-reuse projects.

ACKNOWLEDGEMENTS

This work is a collaborative result of scientific exchange from four research projects that were all funded by the German Ministry of Education and Research (BMBF) (02WV1561, 02WV1562, 02WV1563, and 02WV1564). We thank numerous researchers in the projects and the DECHEMA for their organizational support.

DATA AVAILABILITY STATEMENT

All relevant data are included in the paper or its Supplementary Information.

CONFLICT OF INTEREST

The authors declare there is no conflict.

REFERENCES

- Ahmadi, J., Hübner, U., Aumeier, B. M., Zumkeller, F. & Drewes, J. E. (2025) Risk-based chemical contaminant framework to comply with the EU nonpotable reuse regulation, *ACS EST Water*, **5**, 3684–3699. <https://doi.org/10.1021/acsestwater.4c01256>.
- Alegbeleye, O. & Sant'Ana, A. S. (2023) Microbiological quality of irrigation water for cultivation of fruits and vegetables: an overview of available guidelines, water testing strategies and some factors that influence compliance, *Environ. Res.*, **220**, 114771. <https://doi.org/10.1016/j.envres.2022.114771>.
- Arp, H. P. H., Gredelj, A., Glüge, J., Scheringer, M. & Cousins, I. T. (2024) The global threat from the irreversible accumulation of trifluoroacetic acid (TFA), *Environ. Sci. Technol.*, **58**, 19925–19935. <https://doi.org/10.1021/acs.est.4c06189>.
- Arthur, B. K. (2021) *Suitability of Differently Coated Fluorescent Microspheres for Simulating Sedimentation, Sorption and Transport of Helminth Eggs During Wastewater Treatment of Soil Infiltration*. Ruhr-Universität Bochum. <https://doi.org/10.13154/294-7799>.
- Bautista, A., Björnsdotter, M., Sáez, C., Jurado, A., Llorca, M., Pujades, E. & Farré, M. (2024) Determination of persistent and mobile organic compounds in the river–groundwater interface of the Besòs river delta, Spain, using a wide extraction approach, *Chemosphere*, **368**, 143673. <https://doi.org/10.1016/j.chemosphere.2024.143673>.
- Ben Mordehay, E., Mordehay, V., Tarchitzky, J. & Chefetz, B. (2021) Pharmaceuticals in edible crops irrigated with reclaimed wastewater: evidence from a large survey in Israel, *J. Hazard. Mater.*, **416**, 126184. <https://doi.org/10.1016/j.jhazmat.2021.126184>.
- Benelhadj, L., Nortes-Tortosa, P. A., Alarcón, J. J. & Ponce-Robles, L. (2024) Impact of the use of different types of quaternary treated wastewater effluents in carrot crops growing: uptake and accumulation of contaminants of emerging concern in soil-plant system and human health implications, *Chemosphere*, **368**, 143697. <https://doi.org/10.1016/j.chemosphere.2024.143697>.
- Betancourt, W. Q. (2023) *Indicator Viruses to Confirm Advanced Physical Treatment*. The Water Research Foundation (WaterRF) (2023): Project no. 4955. Denver, CO: The Water Research Foundation.
- Björnsdotter, M. K., Hartz, W. F., Kallenborn, R., Ericson Jogsten, I., Humby, J. D., Kärrman, A. & Yeung, L. W. Y. (2021) Levels and seasonal trends of C₁–C₄ perfluoroalkyl acids and the discovery of trifluoromethane sulfonic acid in surface snow in the Arctic, *Environ. Sci. Technol.*, **55**, 15853–15861. <https://doi.org/10.1021/acs.est.1c04776>.
- Bliedung, A., Dockhorn, T., Germer, J., Mayerl, C. & Mohr, M. (2020) Experiences of running a hydroponic system in a pilot scale for resource-efficient water reuse, *J. Water Reuse Desalin.*, **10**, 347–362. <https://doi.org/10.2166/wrd.2020.014>.
- Bruzzoniti, M. C., Del Bubba, M., Giordani, E., Fibbi, D., Beldean-Galea, M. S., Piesik, D. & Rivoira, L. (2024) Organic micropollutants in the agricultural chain of production of strawberries by irrigation with treated wastewater and assessment of human health implications, *Water*, **16**, 830. <https://doi.org/10.3390/w16060830>.
- Buck, R. C., Franklin, J., Berger, U., Conder, J. M., Cousins, I. T., de Voogt, P., Jensen, A. A., Kannan, K., Mabury, S. A. & van Leeuwen, S. P. (2011) Perfluoroalkyl and polyfluoroalkyl substances in the environment: terminology, classification, and origins, *Integr. Environ. Assess. Manag.*, **7**, 513–541. <https://doi.org/10.1002/ieam.258>.
- Carstens, C. K., Salazar, J. K. & Darkoh, C. (2019) Multistate outbreaks of foodborne illness in the United States associated with fresh produce from 2010 to 2017, *Front. Microbiol.*, **10**, 2667. <https://doi.org/10.3389/fmicb.2019.02667>.
- Cerqueira, F., Matamoros, V., Bayona, J. & Piña, B. (2019) Antibiotic resistance genes distribution in microbiomes from the soil-plant-fruit continuum in commercial *Lycopersicon esculentum* fields under different agricultural practices, *Sci. Total Environ.*, **652**, 660–670. <https://doi.org/10.1016/j.scitotenv.2018.10.268>.
- Christou, A., Beretsou, V. G., Iakovides, I. C., Karaolia, P., Michael, C., Benmarhnia, T., Chefetz, B., Donner, E., Gawlik, B. M., Lee, Y., Lim, T. T., Lundy, L., Maffettone, R., Rizzo, L., Topp, E. & Fatta-Kassinos, D. (2024) Sustainable wastewater reuse for agriculture, *Nat. Rev. Earth Environ.*, **5**, 504–521. <https://doi.org/10.1038/s43017-024-00560-y>.
- Cybulski, J., Witczak, A. & Pokorska-Niewiada, K. (2022) Residues of endocrine-disrupting PCBs in drinking water – influence of water and wastewater treatment in Szczecin (Poland), *Urban Water J.*, **19**, 641–649. <https://doi.org/10.1080/1573062X.2022.2059381>.
- DE (2010) *Groundwater Ordinance of 9 November 2010*, Federal Law Gazette I, p. 1513, as last amended by Art. 1 of the Ordinance of 4 May 2017 (Federal Law Gazette I, p. 1044). Bonn: Federal Law Gazette.
- DE (2021) *Federal Soil Protection and Contaminated Sites Ordinance of 9 July 2021*, German Federal Law Gazette (BGBl.) I. Bonn: Federal Law Gazette.
- DE (2023) *Drinking Water Ordinance of 20 June 2023*, German Federal Law Gazette 2023 (BGBl.) I No. 159, p. 2. Bonn: Federal Law Gazette.
- DIN (1999) DIN 19650:1999-02, *Irrigation – Hygienic Concerns of Irrigation Water*. DIN 19650:1999-02. Berlin: DIN Media GmbH. <https://doi.org/10.31030/8016564>.
- DIN (2009) DIN 19684-10:2009-01, *Soil Quality – Chemical Laboratory Tests – Part 10: Testing and Evaluation of Water for Irrigation*. Berlin: DIN Media GmbH. <https://doi.org/10.31030/1471458>.
- DIN EN ISO (1999) *Water Quality – Detection and Enumeration of Intestinal Enterococci in Surface and Waste Water – Part 1: Miniaturized Method (Most Probable Number) by Inoculation in Liquid Medium (ISO 7899-1:1998)*. German Version EN ISO 7899-1:1998. Berlin: DIN Media GmbH. <https://doi.org/10.31030/8106474>.
- DIN EN ISO (2000) *Water Quality – Detection and Enumeration of Intestinal Enterococci – Part 2: Membrane Filtration Method (ISO 7899-2:2000)*. German Version EN ISO 7899-2:2000. Berlin: DIN Media GmbH. <https://doi.org/10.31030/8974114>.

- DIN EN ISO (2002) *Water Quality – Detection and Enumeration of Bacteriophages – Part 2: Enumeration of Somatic Coliphages (ISO 10705-2:2000)*. German Version EN ISO 10705-2:2001. Berlin: DIN Media GmbH. <https://doi.org/10.31030/9224349>.
- DIN EN ISO 9308-3 (1999) *Water Quality – Detection and Enumeration of Escherichia coli and Coliform Bacteria in Surface and Waste Water – Part 3: Miniaturized Method (Most Probable Number) by Inoculation in Liquid Medium (ISO 9308-3:1998)*. German Version EN ISO 9308-3:1998. Berlin: DIN Media GmbH. <https://doi.org/10.31030/8106465>.
- DIN EN ISO 9308-2 (2014) *Water Quality – Enumeration of Escherichia coli and Coliform Bacteria – Part 2: Most Probable Number Method (ISO 9308-2:2012)*. German Version EN ISO 9308-2:2014. Berlin: DIN Media GmbH. <https://doi.org/10.31030/2148738>.
- DIN EN ISO 14189 (2016) *Water Quality – Enumeration of Clostridium perfringens – Method Using Membrane Filtration (ISO 14189:2013)*. German Version EN ISO 14189:2016. Berlin: DIN Media GmbH. <https://doi.org/10.31030/2552455>.
- DIN EN ISO 9308-1 (2017) *Water Quality – Enumeration of Escherichia coli and Coliform Bacteria – Part 1: Membrane Filtration Method for Waters with Low Bacterial Background Flora (ISO 9308-1:2014 + Amd 1:2016)*. German Version EN ISO 9308-1:2014 + A1:2017. Berlin: DIN Media GmbH. <https://doi.org/10.31030/2630794>.
- DIN EN ISO 11731 (2019) *Water Quality – Enumeration of Legionella (ISO 11731:2017); German Version EN ISO 11731:2017*. Berlin: DIN Media GmbH. <https://doi.org/10.31030/3019913>
- Dittmann, D., Seelig, A. H., Thalmann, M., Wilkes, T., Junghans, V., Zahn, D., Klitzke, S., Peters, A., Haberkamp, J., Reemtsma, T. & Ruhl, A. S. (2024) *Potential and risks of water reuse in Brandenburg (Germany) – an interdisciplinary case study*, *Water Reuse*, **14**, 1–15. <https://doi.org/10.2166/wrd.2024.081>.
- DWA (In progress) *DWA-M1200, Wasserwiederverwendung für landwirtschaftliche und urbane Zwecke, Internal Working Document*. Unpublished Draft. Hennef: Deutsche Vereinigung für Wasserwirtschaft, Abwasser und Abfall e. V. (DWA).
- EFSA (2018) *Salmonella the Most Common Cause of Foodborne Outbreaks in the European Union [WWW Document]*. Parma: European Food Safety Authority. Available at: <https://www.efsa.europa.eu/en/news/salmonella-most-common-cause-foodborne-outbreaks-european-union>.
- Espigares, E., Bueno, A., Espigares, M. & Gálvez, R. (2006) *Isolation of Salmonella serotypes in wastewater and effluent: effect of treatment and potential risk*, *Int. J. Hyg. Environ. Health*, **209**, 103–107. <https://doi.org/10.1016/j.ijheh.2005.08.006>.
- Estoppey, N., Knight, E. R., Allan, I. J., Ndungu, K., Slinde, G. A., Rundberget, J. T., Ylivainio, K., Hernandez-Mora, A., Sørmo, E., Arp, H. P. H. & Cornelissen, G. (2024) *PFAS, PCBs, PCDD/Fs, PAHs and extractable organic fluorine in bio-based fertilizers, amended soils and plants: exposure assessment and temporal trends*, *Sci. Total Environ.*, **957**, 177347. <https://doi.org/10.1016/j.scitotenv.2024.177347>.
- EU (1986) Consolidated Text: Council Directive of 12 June 1986 on the Protection of the Environment, and in Particular of the Soil, When Sewage Sludge is Used in Agriculture (86/278/EEC). Luxembourg: Official Journal L 181, 04/07/1986.
- EU (1991) *Council Directive 91/271/EEC of 21 May 1991 Concerning Urban Waste-Water Treatment*. Luxembourg: Office for Official Publications of the European Communities. Official Journal of the European Communities, L 135, 30 May 1991, pp. 40–52.
- EU (2000) *Directive 2000/60/EC of the European Parliament and of the Council of 23 October 2000 Establishing a Framework for Community Action in the Field of Water Policy*. Luxembourg: Office for Official Publications of the European Communities. OJ L 327, 22.12.2000, p. 1–73.
- EU (2004) *Consolidated Text: Regulation (EC) No 852/2004 of the European Parliament and of the Council of 29 April 2004 on the Hygiene of Foodstuffs*. Luxembourg: Office for Official Publications of the European Communities. OJ L 139, 30.4.2004, p. 1–54.
- EU (2005) Regulation (EC) No. 396/2005 of the European Parliament and of the Council of 23 February 2005 on Maximum Residue Levels of Pesticides in or on Food and Feed of Plant and Animal Origin and Amending Council Directive 91/414/EEC Text with EEA Relevance. Luxembourg: Office for Official Publications of the European Communities. OJ L 70, 16.3.2005, p. 1–16.
- EU (2006) *Directive 2006/118/EC of the European Parliament and of the Council of 12 December 2006 on the Protection of Groundwater Against Pollution and Deterioration*. Luxembourg: Office for Official Publications of the European Communities. OJ L 372, 27.12.2006, p. 19–31.
- EU (2008) Consolidated Text: Council Directive of 12 December 1991 Concerning the Protection of Waters Against Pollution Caused by Nitrates From Agricultural Sources (91/676/EEC). Luxembourg: Office for Official Publications of the European Communities. OJ L 375, 31.12.1991, p. 1–8.
- EU (2009a) Consolidated Text: Commission Regulation (EU) No 142/2011 of 25 February 2011 Implementing Regulation (EC) No. 1069/2009 of the European Parliament and of the Council Laying Down Health Rules as Regards Animal by-Products and Derived Products Not Intended for Human Consumption and Implementing Council Directive 97/78/EC as Regards Certain Samples and Items Exempt From Veterinary Checks at the Border Under That Directive (Text with EEA Relevance)Text with EEA Relevance. Luxembourg: Office for Official Publications of the European Communities. OJ L 54, 26.2.2011, p. 1–254.
- EU (2009b) Regulation (EC) No 1069/2009 of the European Parliament and of the Council of 21 October 2009 Laying Down Health Rules as Regards Animal by-Products and Derived Products not Intended for Human Consumption and Repealing Regulation (EC) No. 1774/2002 (Animal by-Products Regulation). Luxembourg: Office for Official Publications of the European Communities. OJ L 300, 14.11.2009, p. 1–33.
- EU (2013a) *A Water Blueprint for Europe*. European Commission. Directorate General for the Environment. Luxembourg: Publications Office.
- EU (2013b) *Directive 2008/105/EC of the European Parliament and of the Council of 16 December 2008 on Environmental Quality Standards in the Field of Water Policy, Amending and Subsequently Repealing Council Directives 82/176/EEC, 83/513/EEC, 84/156/*

- EEC, 84/491/EEC, 86/280/EEC and Amending Directive 2000/60/EC of the European Parliament and of the Council. Luxembourg: Office for Official Publications of the European Communities. OJ L 348, 24.12.2008, p. 84–97.
- EU (2014) Consolidated Text: Directive 2006/7/EC of the European Parliament and of the Council of 15 February 2006 Concerning the Management of *Bathing Water Quality and Repealing Directive 76/160/EEC*. Luxembourg: Office for Official Publications of the European Communities. OJ L 64, 4.3.2006, p. 37–51.
- EU (2018) Commission Staff Working Document Impact Assessment Accompanying the Document Proposal for a Regulation of the European Parliament and of the Council on Minimum Requirements for *Water Reuse*. Luxembourg: Office for Official Publications of the European Communities.
- EU (2019) *Common Implementation Strategy for the Water Framework Directive and the Foods Directive Voluntary Groundwater Watch List V. 3.1*. Luxembourg: Office for Official Publications of the European Communities.
- EU (2020a) *Regulation (EU) 2020/741 of the European Parliament and of the Council of 25 May 2020 on Minimum Requirements for Water Reuse*. Luxembourg: Office for Official Publications of the European Communities. OJ L 177, 5.6.2020, p. 32–55.
- EU (2020b) Directive (EU) 2020/2184 of the European Parliament and of the Council of 16 December 2020 on the Quality of Water Intended for Human Consumption (Recast) (Text with EEA Relevance). Luxembourg: Office for Official Publications of the European Communities. ABl. L 435 vom 23.12.2020, S. 1–62.
- EU (2020c) Consolidated Text: Commission Regulation (EC) No 2073/2005 of 15 November 2005 on Microbiological Criteria for *Foodstuffs (Text with EEA Relevance)Text with EEA Relevance*. Luxembourg: Office for Official Publications of the European Communities.
- EU (2022a) *Proposal for a Directive Amending the Water Framework Directive, the Groundwater Directive and the Environmental Quality Standards Directive*. Brussels: European Commission.
- EU (2022b) Consolidated Text: Regulation (EC) No 183/2005 of the European Parliament and of the Council of 12 January 2005 *Laying Down Requirements for Feed Hygiene (Text with EEA Relevance)*. Luxembourg: Office for Official Publications of the European Communities.
- EU (2023) Commission Regulation (EU) 2023/915 of 25 April 2023 on Maximum Levels for Certain Contaminants in *Food and Repealing Regulation (EC) No. 1881/2006 (Text with EEA Relevance)*. Luxembourg: Office for Official Publications of the European Communities.
- EU (2024a) *Commission Delegated Regulation (EU) 2024/1765 of 11 March 2024 Supplementing Regulation (EU) 2020/741 of the European Parliament and of the Council with Regard to Technical Specifications of the key Elements of Risk Management*. Luxembourg: Office for Official Publications of the European Communities.
- EU (2024b) Directive (EU) 2024/3019 of the European Parliament and of the Council of 27 November 2024 Concerning Urban Wastewater Treatment (Recast) (Text with EEA Relevance). Luxembourg: Office for Official Publications of the European Communities.
- EU (2024c) Proposal for a Directive of the European Parliament and the Council Amending Directive 2000/60/EC Establishing a Framework for Community Action in the Field of Water Policy, Directive 2006/118/EC on the Protection of Groundwater Against Pollution and Deterioration and Directive 2008/105/EC on Environmental Quality Standards in the Field of Water Policy. Brussels: European Commission.
- Fernandes, A. S., Bragança, I. & Homem, V. (2024) *Personal care products in soil-plant and hydroponic systems: uptake, translocation, and accumulation*, *Sci. Total Environ.*, **912**, 168894. <https://doi.org/10.1016/j.scitotenv.2023.168894>.
- Finckh, S., Beckers, L.-M., Busch, W., Carmona, E., Dulio, V., Kramer, L., Krauss, M., Posthuma, L., Schulze, T., Slotweg, J., Von Der Ohe, P. C. & Brack, W. (2022) *A risk based assessment approach for chemical mixtures from wastewater treatment plant effluents*, *Environ. Int.*, **164**, 107234. <https://doi.org/10.1016/j.envint.2022.107234>.
- Fout, G. S., Cashdollar, J. L., Varughese, E. A., Parshionikar, S. U. & Grimm, A. C. (2015) *EPA method 1615. measurement of Enterovirus and Norovirus occurrence in water by culture and RT-qPCR. I. Collection of virus samples*, *J. Vis. Exp.*, **97**, 52067. <https://doi.org/10.3791/52067-v>.
- García-Valverde, M., Aragonés, A. M., Andújar, J. A. S., García, M. D. G., Martínez-Bueno, M. J. & Fernández-Alba, A. R. (2023) *Long-term effects on the agroecosystem of using reclaimed water on commercial crops*, *Sci. Total Environ.*, **859**, 160462. <https://doi.org/10.1016/j.scitotenv.2022.160462>.
- Glüge, J., Scheringer, M., Cousins, I. T., DeWitt, J. C., Goldenman, G., Herzke, D., Lohmann, R., Ng, C. A., Trier, X. & Wang, Z. (2020) *An overview of the uses of per- and polyfluoroalkyl substances (PFAS)*, *Environ. Sci. Process. Impacts*, **22**, 2345–2373. <https://doi.org/10.1039/D0EM00291G>.
- Gnirss, R., Lüdicke, C., Beraktschjan, M., Renner, P., Feuerpfel, I., Dizer, H., Szewzyk, R. & Selinka, H.-C. (2015) *Wastewater disinfection. Process comparison in relation to indicator organisms. Hennef: The network of expert for water, wastewater and waste (DWA). Korrespondenz Abwasser, Abfall*, pp. 225–238.
- Gocht, T., Ligouis, B., Hinderer, M. & Grathwohl, P. (2007) *Accumulation of polycyclic aromatic hydrocarbons in rural soils based on mass balances at the catchment scale*, *Environ. Toxicol. Chem.*, **26**, 591–600. <https://doi.org/10.1897/06-287R.1>.
- Haddaoui, I., Mahjoub, O., Mahjoub, B., Boujelben, A. & Di Bella, G. (2016) *Occurrence and distribution of PAHs, PCBs, and chlorinated pesticides in Tunisian soil irrigated with treated wastewater*, *Chemosphere*, **146**, 195–205. <https://doi.org/10.1016/j.chemosphere.2015.12.007>.
- Hill, V. R., Polaczyk, A. L., Kahler, A. M., Cromeans, T. L., Hahn, D. & Amburgey, J. E. (2009) *Comparison of hollow-fiber ultrafiltration to the USEPA VIRADEL technique and USEPA method 1623*, *J. Environ. Qual.*, **38**, 822–825. <https://doi.org/10.2134/jeq2008.0152>.
- Ho, J., Ahmadi, J., Schweikart, C., Hübner, U., Schwaller, C., Tiehm, A. & Drewes, J. E. (2024) *Assuring reclaimed water quality using a multi-barrier treatment train according to the new EU non-potable water reuse regulation*, *Water Res.*, **267**, 122429. <https://doi.org/10.1016/j.watres.2024.122429>.

- ISO (2009) *DIN 19684-10:2009-01, Soil Quality – Chemical Laboratory Tests – Part 10: Testing and Evaluation of Water for Irrigation*. Berlin: DIN Media GmbH. <https://doi.org/10.31030/1471458>.
- ISO (2020) *ISO 16075-1:2020-11, Guidelines for Treated Wastewater Use for Irrigation Projects – Part 1: the Basis of a Reuse Project for Irrigation*. Geneva: International Standard Organisation.
- ISO 10705-1 (1995) *Water Quality – Detection and Enumeration of Bacteriophages – Part 1: Enumeration of F-Specific RNA Bacteriophages*. Geneva: International Standard Organisation.
- Jahn, K. L., Saffer, D. M., Freeman, K. H. & Lincoln, S. A. (2023) Storage, transport, and fate of perfluoroalkyl acids (PFAAs) in a wastewater reuse and groundwater recharge system, *Water Resour. Res.*, **59**, e2022WR034321. <https://doi.org/10.1029/2022WR034321>.
- Jekel, M., Dott, W., Bergmann, A., Dünnbier, U., Gnirß, R., Haist-Gulde, B., Hamscher, G., Letzel, M., Licha, T., Lyko, S., Miehe, U., Sacher, F., Scheurer, M., Schmidt, C. K., Reemtsma, T. & Ruhl, A. S. (2015) Selection of organic process and source indicator substances for the anthropogenically influenced water cycle, *Chemosphere*, **125**, 155–167. <https://doi.org/10.1016/j.chemosphere.2014.12.025>.
- Joerss, H., Freeling, F., Van Leeuwen, S., Hollender, J., Liu, X., Nödler, K., Wang, Z., Yu, B., Zahn, D. & Sigmund, G. (2024) Pesticides can be a substantial source of trifluoroacetate (TFA) to water resources, *Environ. Int.*, **193**, 109061. <https://doi.org/10.1016/j.envint.2024.109061>.
- Kinde, H., Adelson, M., Ardans, A., Little, E., Willoughby, D., Berchtold, D., Read, D., Breitmeyer, R., Kerr, D., Tarbell, R. & Hughes, E. (1997) Prevalence of *Salmonella* in municipal sewage treatment plant effluents in southern California, *Avian Dis.* **41**, 392–398.
- Kodešová, R., Švecová, H., Klement, A., Fér, M., Nikodem, A., Fedorova, G., Rieznyk, O., Kočárek, M., Sadchenko, A., Chroňáková, A. & Grabic, R. (2024) Contamination of water, soil, and plants by micropollutants from reclaimed wastewater and sludge from a wastewater treatment plant, *Sci. Total Environ.*, **907**, 167965. <https://doi.org/10.1016/j.scitotenv.2023.167965>.
- LANUV (2019) *Legionellen in Abwasser und Oberflächenwasser. Empfehlung zur Probenahme und zum Nachweis*, LANUV44-Arbeitsblatt 44. Recklinghausen: North Rhine-Westphalia State Agency for Nature, Environment and Consumer Protection.
- LAWA (2022) *Endbericht der LAWA-Ad hoc AG/KG Water Reuse an die 163*. LAWA-Vollversammlung. Berlin: Bund/Länder-Arbeitsgemeinschaft Wasser (LAWA).
- Liu, H., Whitehouse, C. A. & Li, B. (2018) Presence and persistence of *Salmonella* in water: the impact on microbial quality of water and food safety, *Front. Public Health*, **6**, 159. <https://doi.org/10.3389/fpubh.2018.00159>.
- Liu, Y., Neal, A. L., Zhang, X., Fan, H., Liu, H. & Li, Z. (2022) Cropping system exerts stronger influence on antibiotic resistance gene assemblages in greenhouse soils than reclaimed wastewater irrigation, *J. Hazard. Mater.*, **425**, 128046. <https://doi.org/10.1016/j.jhazmat.2021.128046>.
- Loos, R., Carvalho, R., António, D. C., Comero, S., Locoro, G., Tavazzi, S., Paracchini, B., Ghiani, M., Lettieri, T., Blaha, L., Jarosova, B., Voorspoels, S., Servaes, K., Haglund, P., Fick, J., Lindberg, R. H., Schwesig, D. & Gawlik, B. M. (2013) EU-wide monitoring survey on emerging polar organic contaminants in wastewater treatment plant effluents, *Water Res.*, **47**, 6475–6487. <https://doi.org/10.1016/j.watres.2013.08.024>.
- Mahapatra, S., Ali, M. H., Samal, K. & Moulick, S. (2022) Diagnostic and treatment technologies for detection and removal of helminth in wastewater and sludge, *Energy Nexus*, **8**, 100147. <https://doi.org/10.1016/j.nexus.2022.100147>.
- Masoner, J. R., Kolpin, D. W., Cozzarelli, I. M., Bradley, P. M., Arnall, B. B., Forshay, K. J., Gray, J. L., Groves, J. F., Hladik, M. L., Hubbard, L. E., Iwanowicz, L. R., Jaeschke, J. B., Lane, R. F., McCleskey, R. B., Polite, B. F., Roth, D. A., Pettijohn, M. B. & Wilson, M. C. (2023) Contaminant exposure and transport from three potential reuse waters within a single watershed, *Environ. Sci. Technol.*, **57**, 1353–1365. <https://doi.org/10.1021/acs.est.2c07372>.
- Montemurro, N., Postigo, C., Chirón, S., Barcelò, D. & Pérez, S. (2019) Analysis and fate of 14 relevant wastewater-derived organic pollutants in long-term exposed soil, *Anal. Bioanal. Chem.*, **411**, 2687–2696. <https://doi.org/10.1007/s00216-019-01715-3>.
- Müller, K., Zahn, D., Frömel, T. & Knepper, T. P. (2020) Matrix effects in the analysis of polar organic water contaminants with HILIC-ESI-MS, *Anal. Bioanal. Chem.*, **412**, 4867–4879. <https://doi.org/10.1007/s00216-020-02548-1>.
- Muschket, M., Neuwald, I. J., Zahn, D., Seelig, A. H., Kuckelkorn, J., Knepper, T. P. & Reemtsma, T. (2024) Fate of persistent and mobile chemicals in the water cycle: from municipal wastewater discharges to river bank filtrate, *Water Res.*, **266**, 122436. <https://doi.org/10.1016/j.watres.2024.122436>.
- Naclerio, G., Petrella, E., Nerone, V., Allocca, V., De Vita, P. & Celico, F. (2008) Influence of topsoil of pyroclastic origin on microbial contamination of groundwater in fractured carbonate aquifers, *Hydrogeol. J.*, **16**, 1057–1064. <https://doi.org/10.1007/s10040-008-0297-y>.
- Partyka, M. L. & Bond, R. F. (2022) Wastewater reuse for irrigation of produce: a review of research, regulations, and risks, *Sci. Total Environ.*, **828**, 154385. <https://doi.org/10.1016/j.scitotenv.2022.154385>.
- Paz, A., Tadmor, G., Malchi, T., Blotvogel, J., Borch, T., Polubesova, T. & Chefetz, B. (2016) Fate of carbamazepine, its metabolites, and lamotrigine in soils irrigated with reclaimed wastewater: sorption, leaching and plant uptake, *Chemosphere*, **160**, 22–29. <https://doi.org/10.1016/j.chemosphere.2016.06.048>.
- Rasmusson, K. & Fagerlund, F. (2024) Per- and polyfluoroalkyl substances (PFAS) as contaminants in groundwater resources – a comprehensive review of subsurface transport processes, *Chemosphere*, **362**, 142663. <https://doi.org/10.1016/j.chemosphere.2024.142663>.
- Sauter, D., Stange, C., Schumacher, V., Tiehm, A., Gnirss, R. & Wintgens, T. (2021) Impact of ozonation and biological post-treatment of municipal wastewater on microbiological quality parameters, *Environ. Sci. Water Res. Technol.*, **7**, 1643–1656. <https://doi.org/10.1039/D1EW00312G>.

- Schneeberger, C. L., O'Driscoll, M., Humphrey, C., Henry, K., Deal, N., Seiber, K., Hill, V. R. & Zarate-Bermudez, M. (2015) Fate and transport of enteric microbes from septic systems in a coastal watershed, *J. Environ. Health*, **77**, 22–31.
- Schultz, M. M., Barofsky, D. F. & Field, J. A. (2006) Quantitative determination of fluorinated alkyl substances by large-volume-injection liquid chromatography tandem mass spectrometry characterization of municipal wastewaters, *Environ. Sci. Technol.*, **40**, 289–295. <https://doi.org/10.1021/es051381p>.
- Seelig, A. H., Junghans, V., Reemtsma, T. & Zahn, D. (2025) Plant uptake of persistent and mobile chemicals in rocket (*Eruca sativa*) – a greenhouse study on agricultural wastewater reuse, *Environ. Sci. Technol.*, **59**, 9265–9274. <https://doi.org/10.18452/33506>.
- Seis, W., Zacharias, N., Aumeier, B., Freier, L., Stapf, M., Miehe, U. & Wintgens, T. (2024) Validierungsleitfaden für die uneingeschränkte Bewässerung. Schweiz: Zenodo. <https://doi.org/10.5281/ZENODO.13756832>.
- Shamsizadeh, Z., Ehrampoush, M. H., Nikaeen, M., Mohammadi, F., Mokhtari, M., Gwenzi, W. & Khanahmad, H. (2021) Antibiotic resistance and class 1 integron genes distribution in irrigation water-soil-crop continuum as a function of irrigation water sources, *Environ. Pollut.*, **289**, 117930. <https://doi.org/10.1016/j.envpol.2021.117930>.
- Sinclair, E. & Kannan, K. (2006) Mass loading and fate of perfluoroalkyl surfactants in wastewater treatment plants, *Environ. Sci. Technol.*, **40**, 1408–1414. <https://doi.org/10.1021/es051798v>.
- Söderström, A., Österberg, P., Lindqvist, A., Jönsson, B., Lindberg, A., Blide Ulander, S., Welinder-Olsson, C., Löfdahl, S., Kaijser, B., De Jong, B., Kühlmann-Berenzon, S., Boqvist, S., Eriksson, E., Szanto, E., Andersson, S., Allestam, G., Hedenström, I., Ledet Muller, L. & Andersson, Y. (2008) A large *Escherichia coli* O157 outbreak in Sweden associated with locally produced lettuce, *Foodborne Pathog. Dis.*, **5**, 339–349. <https://doi.org/10.1089/fpd.2007.0065>.
- Stange, C., Sidhu, J. P. S., Toze, S. & Tiehm, A. (2019) Comparative removal of antibiotic resistance genes during chlorination, ozonation, and UV treatment, *Int. J. Hyg. Environ. Health*, **222**, 541–548. <https://doi.org/10.1016/j.ijheh.2019.02.002>.
- Ternes, T. A., Bonerz, M., Herrmann, N., Teiser, B. & Andersen, H. R. (2007) Irrigation of treated wastewater in Braunschweig, Germany: an option to remove pharmaceuticals and musk fragrances, *Chemosphere*, **66**, 894–904. <https://doi.org/10.1016/j.chemosphere.2006.06.035>.
- UBA (2016) *Rahmenbedingungen für die umweltgerechte Nutzung von behandeltem Abwasser zur landwirtschaftlichen Bewässerung*. Dessau: German Environment Agency.
- UBA (2020) *Prioritäre Stoffe in kommunalen Kläranlagen: ein deutschlandweit harmonisiertes Vorgehen*. Dessau: German Environment Agency.
- UBA (2025) *Relevant Micropollutants [WWW Document]*. Available at: <https://www.umweltbundesamt.de/relevante-spurenstoffe?parent=98021#relevante-spurenstoffe>.
- UN (2015) *UN Resolution A/70/L.1 – Transforming our World: the 2030 Agenda for Sustainable Development*. New York: United Nations.
- UNESCO (2017) *Wastewater: an Untapped Resource, The United Nations World Water Development Report*, Paris UNESCO.
- Wachtel, M. R., Whitehand, L. C. & Mandrell, R. E. (2002) Prevalence of *Escherichia coli* associated with a cabbage crop inadvertently irrigated with partially treated sewage wastewater, *J. Food Prot.*, **65**, 471–475. <https://doi.org/10.4315/0362-028X-65.3.471>.
- World Health Organization (2008) *Guidelines for Drinking-Water Quality [Electronic Resource]: Incorporating 1st and 2nd Addenda*, Vol. 1, Recommendations, 3rd edn. Geneva: World Health Organization.

First received 28 February 2025; accepted in revised form 21 June 2025. Available online 11 July 2025